

Customer: ALPS EUROPE DISTRIBUTION

No. KK-2007-3279

Date: May. 09, 2007

Attention:

Your ref. No.:

Your Part No.: RK27114MC00K

SPECIFICATIONS

ALPS' ;

MODEL: RK27114MC00K
(50kAX4)

Spec. No.:

Sample No.: F 4 0 9 1 4 1 4 M

RECEIPT STATUS

RECEIVED

By Date

Signature

Name

Title

ALPS
ALPS ELECTRIC CO., LTD.

DSG'D

Y. Ohya

APP'D

S. Ikenoue

ENG. DEPT. DIVISION

Sales

Head Office
1-7, Yukigaya-otsuka-cho, Ota-ku, Tokyo, 145-8501 Japan
Phone,+81(3)3726-1211

B6523

Q1003#03A (EA)

SPECIFICATIONS

1. THIS SPECIFICATIONS APPLY TO RK27114MCOOK POTENTIOMETER.

2. CONTENTS OF THIS SPECIFICATIONS.

5K274AMS-1

K274AMCOOF

4K16M-1

4K-1

3. MARKING

• MARKING ON ALL UNITS

DATE CODE, RESIST. VALUE, TAPER

4. REMARKS

• FURNISH PACKAGE

NUT:1 WASHER:1

• NOTES

• Silver printed patterns are coated with carbon as a protection against sulphuration.

• Marking ⇒ in specifications shows standard and condition for application.

• CAUTION

There is a possibility that might be affected by contact resistance of resistive element and wiper in case of low impedance of output side in voltage regulation circuit.

For this reason, we require that you adjust to impedance of output side more than 100 times of total resistance.

Regardless of the suggested applications of these products being introduced in the specifications, when using them for equipment and devices requiring a high degree of safety, respective manufacturers will please preserve safety of the planned equipment and devices by providing necessary protective circuits and redundancy circuits and reconfirm if safety is being duly preserved.

Products being introduced in the specifications have been designed and manufactured for applications to ordinary electronic equipment and devices such as the AV equipment, electric home appliances, office machines and communications equipment. Consequently, when employing these products for applications requiring a high degree of safety and reliability such as the medical equipment, aviation and aircraft equipment, space equipment and burglar alarm equipment, the using manufacturers will please thoroughly study the proprieties of these products for the planned applications.

Although we are exerting our best efforts to maintain the quality of these products, we cannot guarantee that they will never cause short circuiting and open circuitry.

Therefore, when designing an equipment or device with which the priority is given to the safety, you will please carefully study the influences to the whole equipment of a single function failure of Potentiometers and Encoders in advance to make out a fail-safe design providing.

Electrical specifications (R1~R4) **50k Ω**
1.Total resistance : Nominal total resistance $\pm 20\%$ ($10k\Omega \leq R \leq 2M\Omega$)
2.Rated voltage : 30V A.C.This potentiometer is designed for A.C. voltage only.
3.Resistance taper : See (HSA02)
4.Maximum attenuation level at full C.C.W. position :

Total resistance	Attenuation level
$R \geq 100k\Omega$	100 dB min.
$100k\Omega > R \geq 50k\Omega$	90 dB min.
$50k\Omega > R \geq 10k\Omega$	80 dB min.

5.Insertion loss at full C.W. position : 0.1 dB max.Measure between (R1,R2)(R3,R4)
6.Gang error : (term 1-2 output V term 1-3 in out V)

Total resistance	Gang error
$R \geq 50k\Omega$	3 dB max. between -70 dB less than -60 dB 2 dB max. between -60 dB ~ 0 dB
$50k\Omega > R \geq 20k\Omega$	3 dB max. between -60 dB less than -40 dB 2 dB max. between -40 dB ~ 0 dB
$20k\Omega > R \geq 10k\Omega$	3 dB max. between -60 dB ~ 0 dB

7.Sliding noise : Less than 47mV measured by JIS C 6443.
(Neglected a impulsive noise at the C.W. and C.C.W. ends of position.)
8.Insulation resistance
Potentiometer section : More than $100M\Omega$ at 500V D.C.
Motor section : More than $1M\Omega$ at 100V D.C.

9.Withstand voltage
Potentiometer section : 500V A.C. for 1 minute.
10.Supply voltage of motor : 4~6V D.C.
11.Motor current(at 4.5V D.C. applied to motor)
Normal operation : 100mA max.
Slipping operation
at both ends : 150mA max.
4.5V D.C.

Endurance specifications
1.Rotational life : 15,000 cycles min.

SYMB	DATE	APPD.	CHKD.	DSGD.	TITLE
					ALPS ELECTRIC CO., LTD.
					00218-1111
					00216/1111
					5K274AMS-1
					DOCUMENT NO.


Feature
This is a potentiometer with D.C. magnet motor and it is adjustable by both manual shaft and motor.
Temperature for operating and storage
1.Dimensions : See attached drawing
2.Operating temperature : -10 $^{\circ}$ C ~ +70 $^{\circ}$ C
3.Storage temperature : -20 $^{\circ}$ C ~ +80 $^{\circ}$ C
4.Motor : D.C. magnet motor
(With 6V Disk Varistor)

Mechanical specifications
1.Operation : manual operation and motor drive
2.Total rotational angle : $300^{\circ} \pm 3'$
3.Rotational speed : 12 ± 3 sec/300 $^{\circ}$
(at 4.5V D.C. applied to motor)
4.Direction of rotation : C.W. rotation at normal polarity.
(When the potentiometer is looked at from the shaft side.)
5.Mechanical noise :

Continuous,monotonous,not unpleasant sound to be heard.
To be mutually discussed when questionable.
6.Rotational torque : 15~45 mN·m (Rotational speed 60 $^{\circ}$ /sec.)
7.Stoppper strength of shaft
with manual operation : No damage with an application of 0.9 N·m.
with motor drive : Shaft must be slipped at the both ends of manual rotation.

8.Bushing nut tightening strength :
Tightening torque to be no greater than 1.5 N·m.
(Pay attention otherwise the strength may not be assured.)
9.Push / pull strength :
No damages with an application of push or pull force
1.0 N for 1.0 sec
10.Resistance to soldering heat :

After soldering there shall be no evidence of poor contact between resistance element and terminals, or any physical damage as a result of the test.
The terminal of the potentiometer
less than 350 $^{\circ}$ C and within 5 sec.
The terminal of the motor
less than 350 $^{\circ}$ C and within 2 sec.

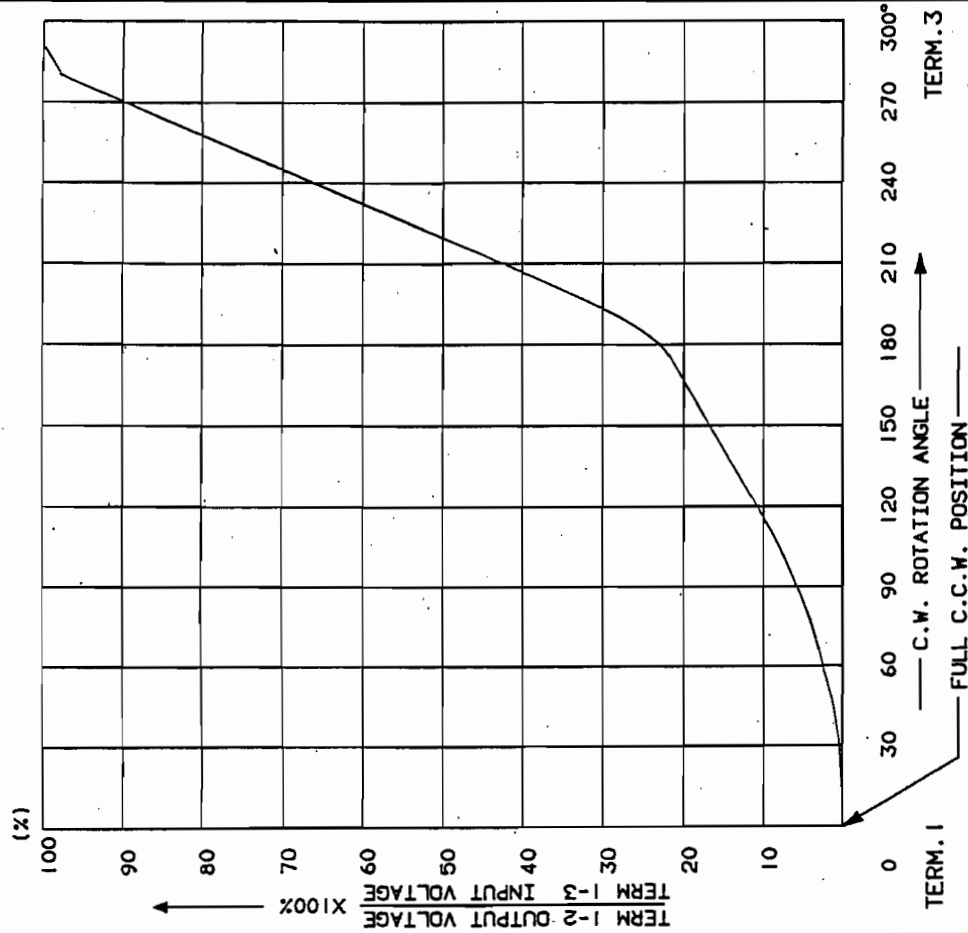


AT 180° C.W. SHAFT ROTATION FROM FULL C.C.W. POSITION; VOLTAGE PERCENT SHALL FALL WITHIN THE LIMITS OF 15 - 30 PERCENT.

SYMB	DATE	APPD	CHKD	DSCD	SCALE	TITLE
85-05-31	7.1	J.K.	S.S.	APPD	RESISTANCE TAPER	RESISTANCE TAPER
						DOCUMENT NO.
						H SA O 2

< はんだ付け時のご注意事項 >
図のようにP. W. Bの上面に はんだ付けをする配線は、お避けて下さい。


Caution for soldering
Please avoid soldering on upper surface of P. W. B. as shown

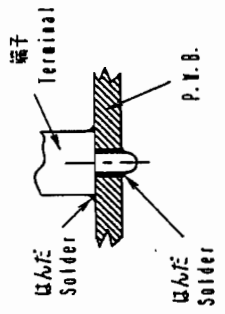


ALPS ELECTRIC CO., LTD.	
SYMB	DATE
APPD	CHKD
DSCD	DSCD
96.1.11	96.1.11
有賀	佐藤
TITLE	DOCUMENT NO.
	4K-1

CLASS.NO.	TITLE	SPECIFICATIONS
	Note	<p>1.The standard test shall be subject to a temperature from 5 °C to 35 °C and relative humidity from 45% to 85%. Test shall be done under environmental requirements of a temperature of 20 ± 2 °C and relative humidity of 65 ± 5% if a decision is in question.</p> <p>2.Notice on motor</p> <p>1)Motor terminals shall not be bent more than twice.</p> <p>2)Soldering to the motor terminals shall be within a few second, not to cause the transformation of terminal base plastics. And, avoid that the flux flows into the motor. Pay special attention to the terminals when they are wave soldered.</p> <p>If the flux flows into the motor, it may cause a poor contact.</p> <p>3)Motor terminal should not be pressed inside the motor. It may cause a poor contact in the motor.</p> <p>4)Pay attention that a piece of iron and an alien substance are not crepted into the motor.</p> <p>5)In operation, temperature around the motor produce an effect on the performance and life. Pay special attention in high temperature and humidity. Storage in high temperature and humidity, and in corrosive gas, shall be avoided.</p> <p>6)In case, using the adhesive agent and the seal agent etc.for fit up, make sure that there is no generation of the harmful gas for motor.(including all chemicals around the motor.) Pay special attention to cyanogen system adhesive agent and organically system silicone.</p>

CLASS.NO.	TITLE	SPECIFICATIONS
	3.Power supply	<p>Regulated D.C. power supply shall be used. (ripple to be 1% max.)Motor terminal shall not be connected with fixed resistors in series. And supply current is to be 350mA min.</p> <p>4.Knob</p> <p>The material of the knob shall be insulation material. As potentiometer is not grounded, conductive material of the knob may cause a earth noise.</p> <p>5.The items except above mentioned items shall meet or exceed JIS C 6443.</p>


SYMB	DATE	APPD	CHKD	DSCD
 ALPS ELECTRIC CO., LTD.				
APPD. DATE		TITLE		
APR 19 1970		SHT-1000		
DSCD. NO.		DOCUMENT NO.		
4K16M-1		4K16M-1		

スリ割角度は任意とする。
SHAFT SLOT IS OPTIONAL ANGLE

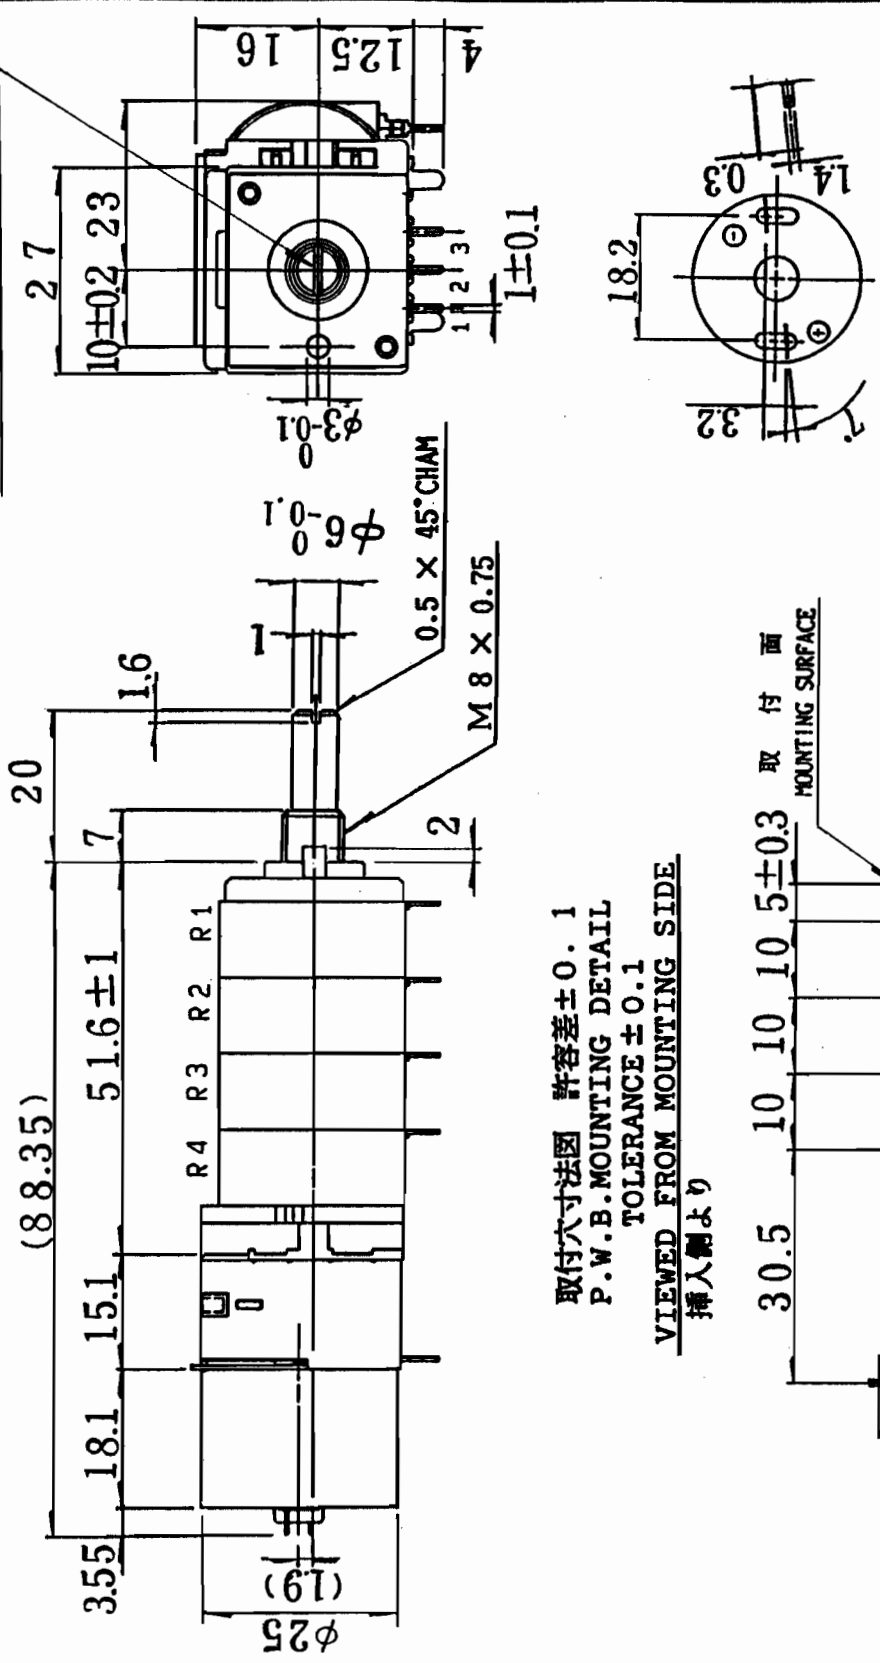

背面図
BACK VIEW

取付穴寸法図 許容差 ± 0.1
P.W.B. MOUNTING DETAIL
TOLERANCE ± 0.1
VIEWED FROM MOUNTING SIDE
挿入側より

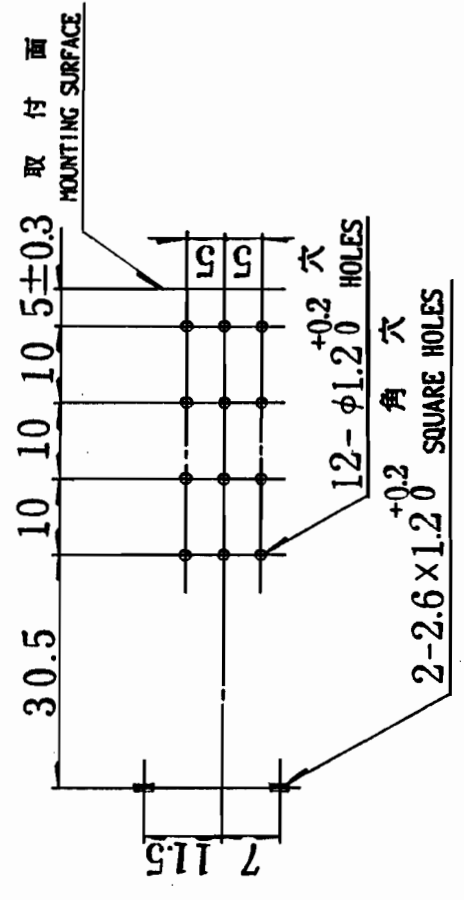

許容差の指定なき寸法の公差 TOLERANCES UNLESS OTHERWISE SPEC	
BASIC DIMENSIONS TOLERANCE	± 0.3
10 < L < 100	± 0.5
100 ≤ L	± 0.8
角度 ANGULAR DIMENSION	± 5°

PART NO.	NAME	MATERIAL NAME & CODE	FINISH
ALPS ALPS ELECTRIC CO., LTD.			
		UNIT mm	SCALE :
SYMB.	DATE	APPD.	CHKD.
		91.10.14 法藤	91.10.12 日下
		91.10.14 WRI	91.10.12 設5
			91.10.12 設5 菅原
		TITLE	DOCUMENT NO.
		27形1軸4連 モータ駆動ポリウム組立図	K274AMCOOF

シールドケース付

91.11.19