

19/26

Customer: \_\_\_\_\_

No. SSV1999-1707

Date: Jul. 12, 1999

Attention: \_\_\_\_\_

Your ref. No: \_\_\_\_\_

Your Part. No: \_\_\_\_\_

**SPECIFICATIONS**

ALPS';

MODEL RS6011YA600M  
( 10 kA )

Spec. No. :

Sample No. : G4O62131M

RECEIPT STATUS  
RECEIVED  
By. Date \_\_\_\_\_  
  
Signature \_\_\_\_\_  
  
Name \_\_\_\_\_  
  
Title \_\_\_\_\_

ALPS ELECTRIC CO., LTD.

HEAD OFFICE  
1-7, YUKIGAYA-OHTSUKA-CHO,  
OHTA-KU, TOKYO 145-8501 JAPAN

DSG'D M. Sato

APP'D H. Kimura

Sales \_\_\_\_\_

20/  
26

No. SSV1999-1707

## SPECIFICATIONS

1. THIS SPECIFICATIONS APPLY TO RS6011YA600M POTENTIOMETERS.

2. CONTENTS OF THIS SPECIFICATIONS.

G4062131M  
4S0001-200, 4S0001-201  
S6028P607A

3. MARKING

-MARKING ON ALL UNITS  
DATE CODE, RESIST. VALUE, TAPER, TRADE MARK

**ELECTRICAL**


- Overall resistance :  $10k\Omega \pm 20\%$
  - Minimum resistance : Across term. 1-2 300 max. , Across term. 2-3 500 max.
  - Taper : A Taper
  - Rated power : 0.1 Watts
  - Rated voltage : Rated voltage =  $\sqrt{P \cdot R}$  (V)  
P : rated power (W)  
R : nominal overall resistance ( $\Omega$ )
- When the rated voltage exceeds the maximum operating voltage the maximum operating voltage shall be the rated voltage.
- Maximum operating voltage : A. C. 150 V , D. C. 10 V
- Dielectric test : Units shall be designed to withstand 300 volts A. C. 50 Hz R. M. S. between resistance elements and case for a period of one minute without damage or arcing.
  - Insulation resistance : Greater than 100 megohms between resistance elements and case when tested by a 250 volts D. C. insulation resistance meter.
  - Sliding life test : 15,000 cycles.

\*Lever shall be operable with speed of 20 mm per sec. without noise by static electricity.



SYMB		DATE	APPD.	CHKD.	DSGD.	TITLE	
						SPECIFICATIONS	
						DOCUMENT NO.	
						G4062131M (1/3)	
						ALPS ELECTRIC CO., LTD.	
						APPD. '96-04-01 Y. YOSHIOKA	
						CHKD. '96-04-01 H. ITO	
						DSGD. '96-04-01 H. KIMURA	

**MECHANICAL**


- Travel : Specified in particular Floure.
- Operating force : 30 - 250 gf ( Note 1 )
- Starting force : Operating force + 100 gf max. ( Note 1 )  
( Note 1 ) Measuring temperature : 5 C - 35 C  
Measuring point : 5 mm from lever end .  
Sliding speed : 20 mm per sec.
- Stop strength :
- 5k<sub>ef</sub> at a position 5 mm from mounting surface.
- Lever lateral play :  
When an alternating bending moment of 250 gf.cm is applied perpendicular to the direction of lever travel , the both sides movement of the lever shall be less than 2x(2xL/20)mm.  
L : Lever length on the measurement point from mte. surface.  
( Note 2 ) Exempt warping of insulated lever.

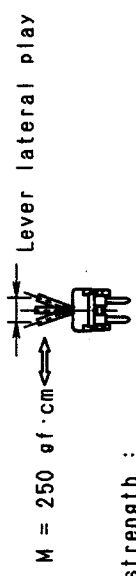

- Lever strength :  
(1) To be resistant with 5 k<sub>ef</sub> static force of pull or push applied to lever in thrust direction for 10 seconds without damage.  
(2) To be resistant with following static force applied to lever in vertical direction to lever driving for 10 seconds without damage.  
① 2 k<sub>ef</sub>.cm over : in case of pot., mounted to chassis with screws.  
② 2 k<sub>ef</sub>.cm over : in case of pot., mounted to P. C. B. with both terminals and mounting plate.

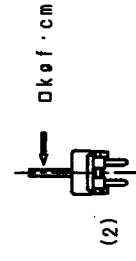

7. Lever inclination and twist :

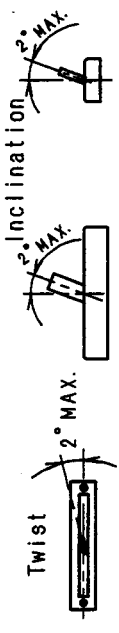


8. Resistance to soldering heat : 3 sec. max. at 300°C

SYMB		DATE	APPD.	CHKD.	DSGD.	TITLE	
						SPECIFICATIONS	
						DOCUMENT NO.	
						G4062131M (1/3)	
						ALPS ELECTRIC CO., LTD.	
						APPD. '96-04-01 Y. YOSHIOKA	
						CHKD. '96-04-01 H. ITO	
						DSGD. '96-04-01 H. KIMURA	



22/26

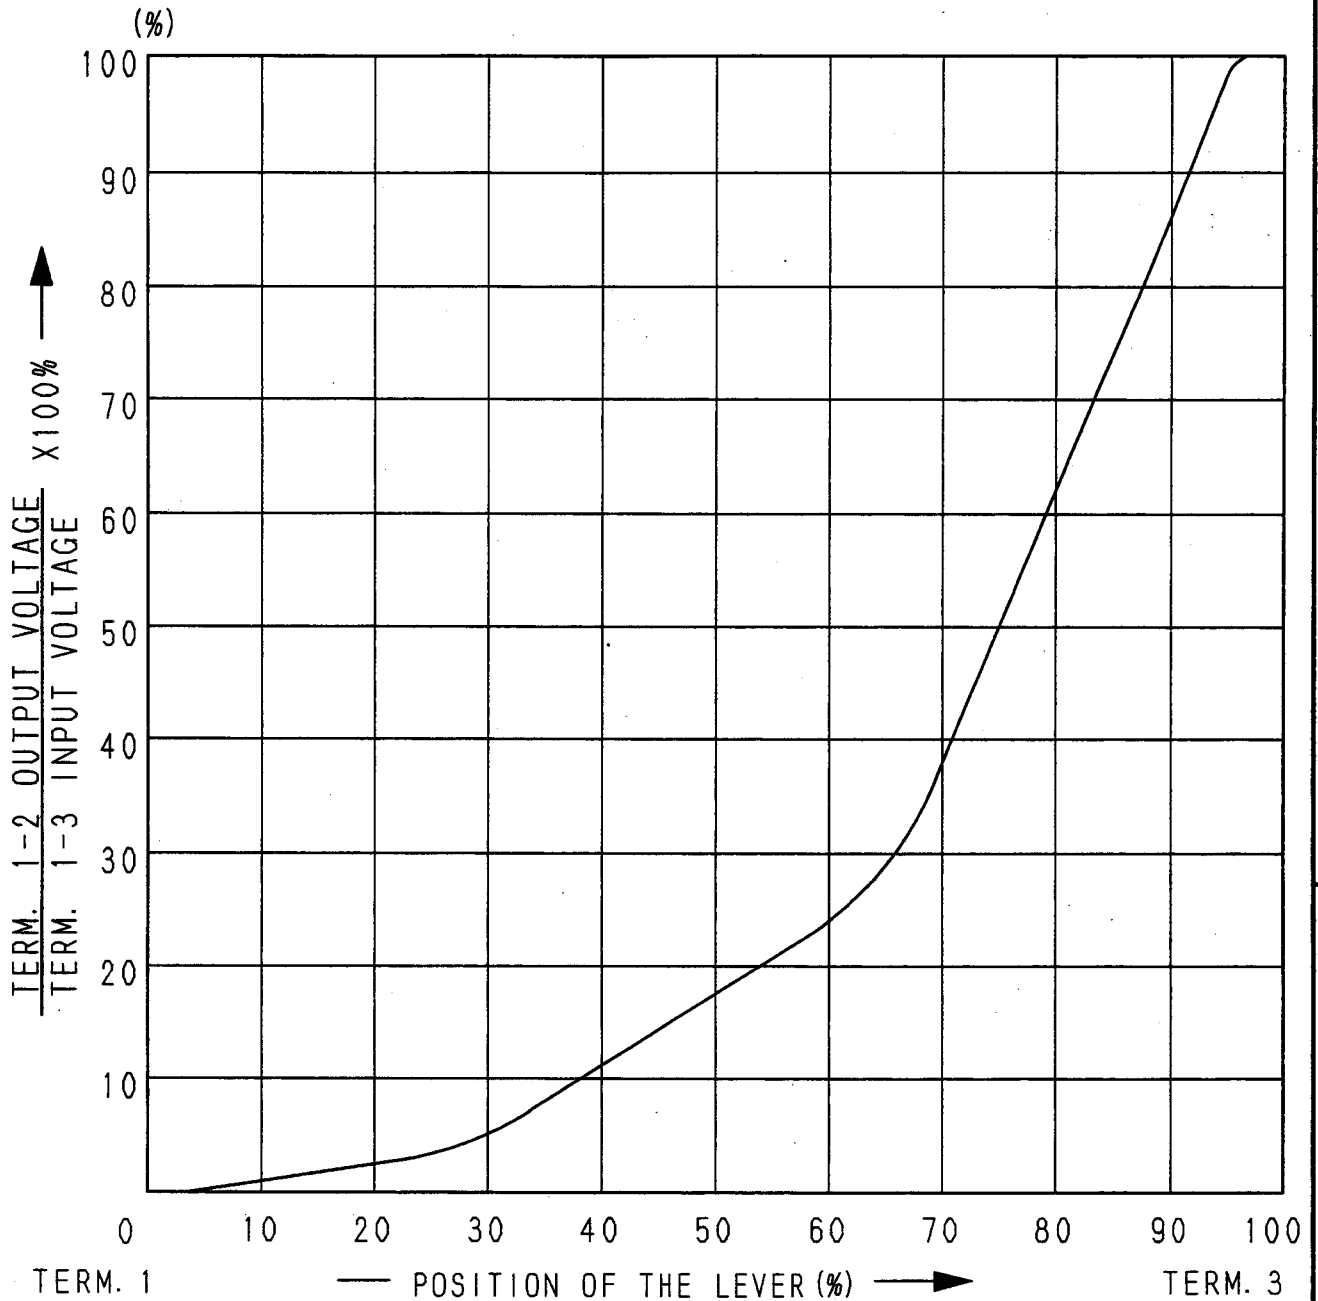


AT 50% TRAVEL FROM TERM. 1 VOLTAGE PERCENT SHALL FALL WITHIN THE LIMITS OF 10~25 PERCENT.

					APPD. <i>Apr. 01. '96</i>	CHKD. /	DSGD. <i>Apr. 01. '96</i>	NAME 60mm TRAVEL TYPE A RESISTANCE TAPER
					<i>S. Sasaki</i>		<i>K. Matsukawa</i>	DOCUMENT NO. G4062131M
SYMB	DATE	APPD	CHKD	DSGD				(3/3)

23/126

**ご使用上の注意**  
**PRECAUTION IN USE**

1. 偏心ツマミをご使用になる場合  
レハ<sup>レバ</sup>の中心より離れたところを作用点としてご使用になる場合、可能な限り下図A寸法を短くしてご使用下さい。  
If it will be used the operating point away from the center line of the lever, it should be shorter as possible.
2. レハ<sup>レバ</sup>の長さについて  
レハ<sup>レバ</sup>の長さについては、ツマミを含めて、下図B面より極力短いものをご使用願います。レハ<sup>レバ</sup>の長さについては、作用点までの距離が短いほどしゅう動感が良好となり、長いほど好ましくない感感になります。  
About the length of lever  
If conditions permit, it is advisable to use the shortest possible lever.  
The longer the length up to operating point, the more unfavorable slide feeling will be given.

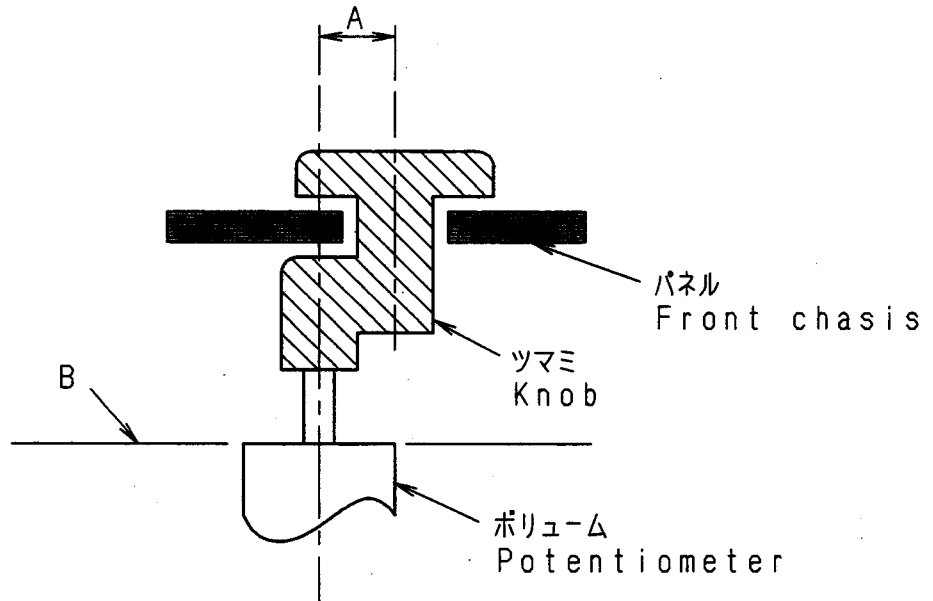

3. レハ<sup>レバ</sup>の駆動に関しては上記内容を考慮の上、セット実装を行いあらかじめ異常のないことをご確認願います。  
Regarding the operation of the lever, please consider the above mentioned, and make sure nothing is wrong with the operation under installing in your appliance that you plan to use our products actually.
4. ツマミ挿入及びレハ<sup>レバ</sup>操作は、ポ<sup>ポ</sup>リウムマウント基板にソリ(曲がり)のない状態で行って下さい。  
Knob assembly on the lever and functioning the lever to be performed under the condition of P. C. B. without warp.

					<b>ALPS ELECTRIC CO., LTD.</b>				
					APPD.	CHKD.	DSGD.	TITLE	スライド <sup>ホ</sup> リウム仕様書
					PD1-ENGI	PD1-ENGI	PD1-ENGI		SPECIFICATIONS
					'95.7.24	'95.7.24	'95.7.24	DOCUMENT NO.	4S0001-200
ORIGINAL	'91-7-3	Y·Y	K·N	S·A	YOSIOKA	KIMURA	Y. SAITOH		
SYMB	DATE	APPD	CHKD	DSGD					
									G4062131M

1. はんだ SOLDER

JIS Z 3282に規定の63% Snはんだを使用  
63% Sn solder specified in JIS Z 3282.

2. 使用基板 BOARD IN USE


両面スルーホール基板又は、片面銅張積層板 板厚  $t=1.6\text{mm}$   
Double-faces through-hole board or Single-face copper laid laminate board.  
Plate thickness ( $t$ )=1.6mm

3. 自動はんだ<DIP条件>

- (1) レハ<sup>レ</sup>位置 センター付近に設定願います。
- (2) フラックス比重  $0.83 \pm 0.01$  (発泡式)
- (3) フラックス高さ フ<sup>レ</sup>リント基板の板厚の半分の位置にフラックスの上面が接するレハ<sup>レ</sup>ル (図1) 又、ホ<sup>レ</sup>リウム挿入面への流れ込みのないこと。(フラックス上がり、飛散に注意)
- (4) フ<sup>レ</sup>リヒート温度  $100^{\circ}\text{C}$  max. 時間1分以内。(フ<sup>レ</sup>リント基板のホ<sup>レ</sup>リウム挿入側の温度)
- (5) はんだ温度  $260^{\circ}\text{C}$  max. 時間5秒以内。 はんだ回数は1回までとする。

IN THE CASE OF DIP SOLDERING

- (1) State of potentiometer  
Position a lever in the vicinity of center.
- (2) Specific Gravity of Flux  
 $0.83 \pm 0.01$  (foaming type)
- (3) Height of Flux face  
A level of the upper face of flux for reaching the position at a half of the plate thickness of printed board. (Fig. 1)  
Further, no flow of flux invading on the surface of printed board on the side of installing potentiometer is allowed.
- (4) Preheat condition  
 $100^{\circ}\text{C}$  max., within 1 minute  
(Temperature on the side of installing printed board is designated.)
- (5) Soldering condition  
Solder temperature:  $260^{\circ}\text{C}$  max.  
Soldering period ; within 5 seconds  
Time of soldering ; only one time is permitted

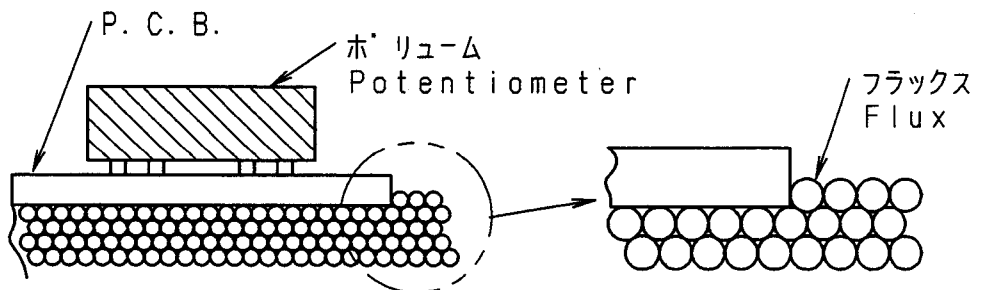

(Fig. 1)

4. 手はんだ IN THE CASE OF MANUAL SOLDERING

はんだ温度  $300^{\circ}\text{C}$  max. 時間3秒以内 はんだ回数は1回までとする。  
Solder temperature :  $300^{\circ}\text{C}$  max.  
Soldering period ; within 3 seconds  
Time of soldering ; only one time is permitted

					<b>ALPS ELECTRIC CO., LTD.</b>			
					APPD.	CHKD.	DSGD.	TITLE
					PDI-ENGI '95.7.24 YOSIOKA	PDI-ENGI '95.7.24 KINURA	PDI-ENGI '95.7.24 Y. SAITOH	スライト <sup>ホ</sup> リウム 仕様書 SPECIFICATIONS 1/2
ORIGINAL	'91-9-3	Y·Y	S·A	S·S				DOCUMENT NO.
SYMB	DATE	APPD	CHKD	DSGD				4S0001-201



25/26

5. 注意事項

- (1) はんだ付けの際に、端子にストレスを加えないで下さい。例えば、端子に熱を加えたまま製品を動かしますと、かしめ力<sup>\*</sup>及び電気的特性が劣化する恐れがあります。
- (2) 両面スルーホール基板を使用する場合は、ホ<sup>\*</sup>リウム挿入側の端子取付穴に、はんだランド<sup>\*</sup>がないようにご配慮願います。ホ<sup>\*</sup>リウム挿入側での配線が必要な場合は端子取付穴からの直接取り出しを避けスルーホール配線用の穴を設けるなどのご配慮をお願いします。
- (3) ホ<sup>\*</sup>リウム挿入側へのはんだ上がりは、はんだ熱による端子接触不良の発生原因となりますので(図2)を参照願います。
- (4) リード<sup>\*</sup>配線の場合、ホ<sup>\*</sup>リウム本体と、はんだ付け部の距離を1mm以上開けてはんだ付け願います。(図3)
- (5) はんだ付けによるホ<sup>\*</sup>リウムへの影響は、フ<sup>\*</sup>リント基板の大きさ、ホ<sup>\*</sup>リウムの取付け位置、はんだ槽の大きさ、等により異なりますのであらかじめ実使用状態で実施し、異常のないことを確認の上、はんだ付けして下さい。

MATTERS TO BE NOTED


- (1) Do not add any stress on terminals in the case of soldering. For instance, forced movement of potentiometer with terminals being heated may probably deteriorate the electric features due to generation of looseness in connection between resistant board and terminals.
- (2) Avoid use of double-faces through-hole board as much as possible. If it is necessary to use it. Do not apply through-hole plating to a hole in which a potentiometer is inserted, and install a land to which terminals are soldered only on a face oppsite to the face on the side of installing potentiometer.
- (3) Use caution to soldering process so as to prevent solder from rising up to the surface of printed board on the side of installing potentiometer, because defective contact may take place in terminal connecting part due to soldering heat. (Fig. 2)
- (4) In the case of lead wiring, solder it so that a gap of 1 mm or more may be reserved between the potentiometer body and soldering part. (Fig. 3)
- (5) The grade of influence of soldering exerted on the potentiometer depends upon the size of a printed board, installing position of the potentiometer, and the size of a solder bath etc. Therefore, make sure, in advance, of no abnormal state under the conditions of soldering to be carried out at present.

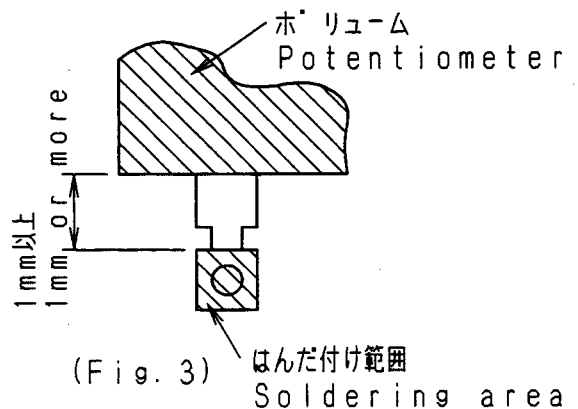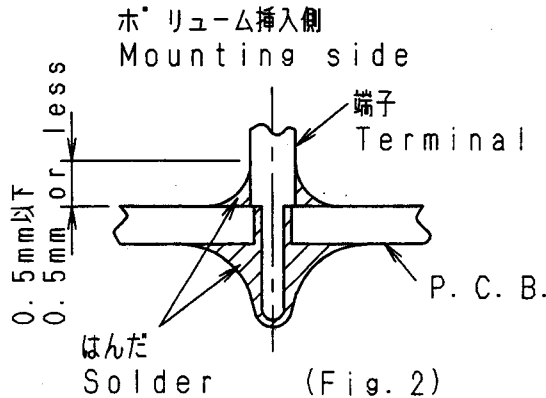

					<b>ALPS ALPS ELECTRIC CO., LTD.</b>				
					APPD.	CHKD.	DSGD.	TITLE	
					PDI-ENGI '95.7.24 YOSIOKA	PDI-ENGI '95.7.24 KIMURA	PDI-ENGI '95.7.24 Y. SAITOH	スライト <sup>*</sup> ホ <sup>*</sup> リウム 仕様書 SPECIFICATIONS 2/2	
ORIGINAL	'91-9-3	Y·Y	S·A	S·S				DOCUMENT NO.	4S0001-201
SYMB	DATE	APPD	CHKD	DSGD					

G4062131M

26/26

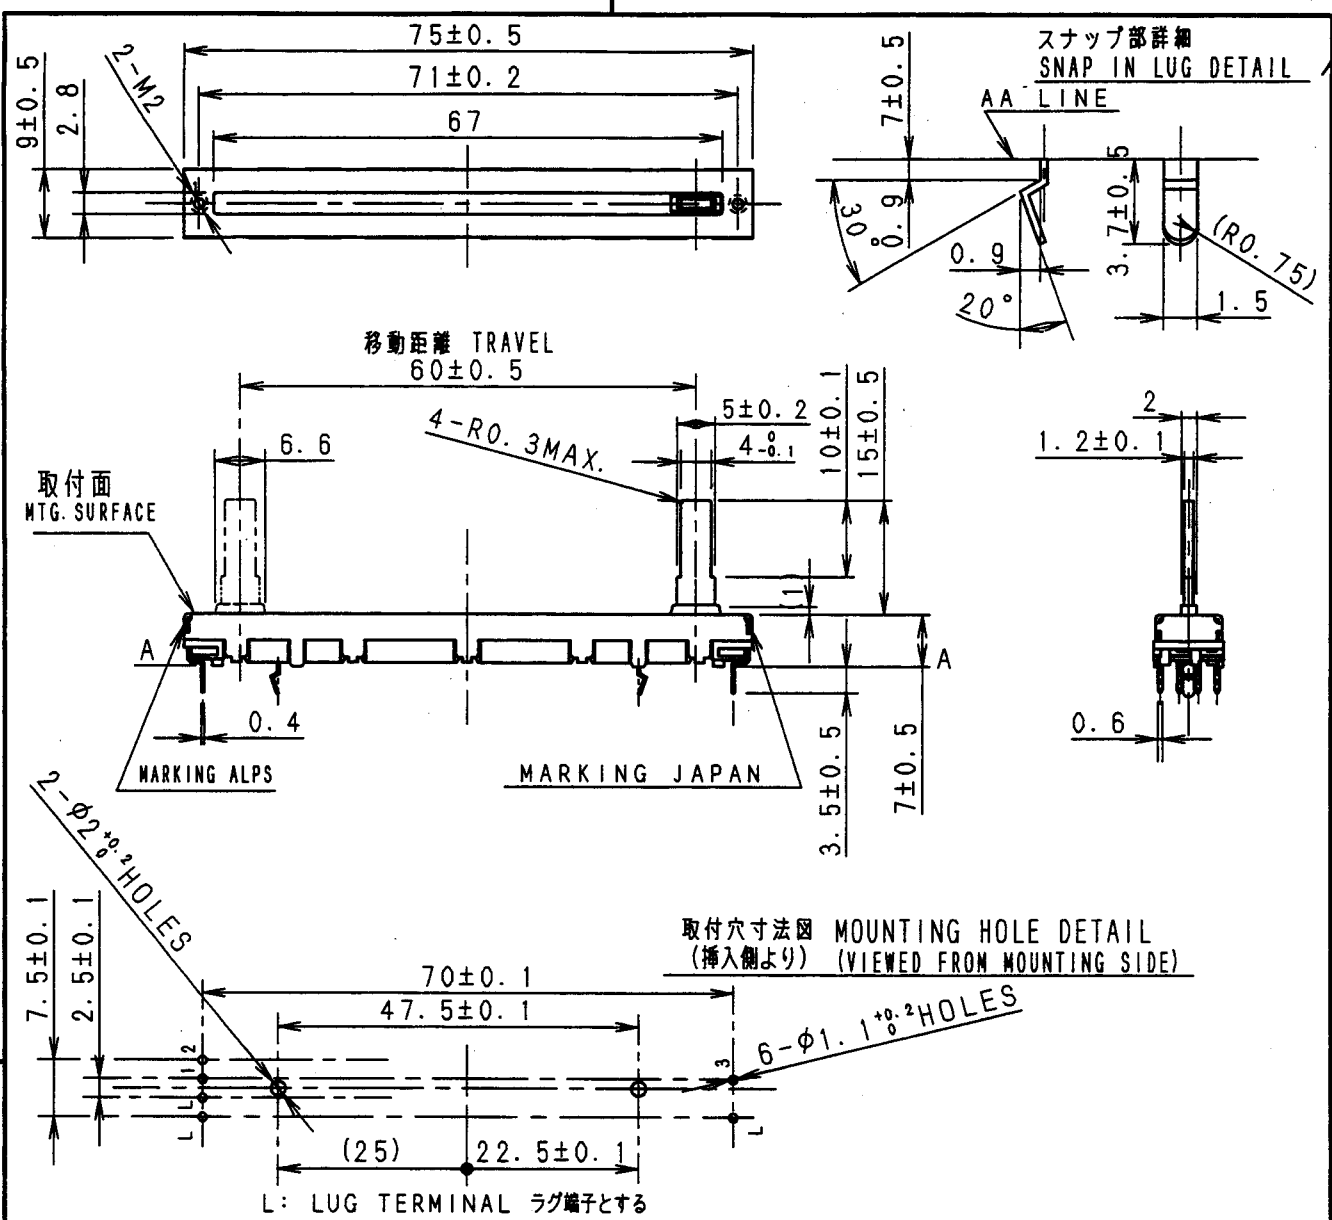

- NOTES
1. MOUNTING SCREW THREAD LENGTH IS CHASSIS THICKNESS +2mmMAX.  
取付用ネジの首下長さは、シャーシ板厚 + 2 mm 以下とする。
  2. TOP SIDE OF KNOB SHALL BE MOUNTED TO LEVER WITHIN 30mm LENGTH FROM LEVER MTG. SURFACE.  
取付面からつまみ先端まで 30mm 以内でご使用願います。
  3. SNAP PORTION IS DESIGNED BASED ON 1.6mm THICK P.C.B.  
スナップ部は、P.C.B. 板厚 1.6mm 基準にて設計してあります。

製品重量 7.0 g  
WEIGHT

指定なき部分の許容差 TOLERANCES UNLESS OTHERWISE SPEC	
$L \leq 10$	±0.3
$10 < L < 100$	±0.5
$100 \leq L$	±0.8
角度 ANGULAR DIMENSION	±5°

PART NO.	NAME	MATERIAL NAME / CODE	FINISH				
<b>ALPS ELECTRIC CO., LTD.</b>							
	DSGD. セツケイ	SCALE	G4062131M				
	K. SATOU '96-06-16	1:1	S6028P607A				
	CHKD.		TITLE				
	S. ABE '93-06-16		SLIDE POTENTIOMETER SINGLE UNIT				
	APPD.	UNIT	DOCUMENT NO.				
SYMB	DATE	APPD	CHKD	DSGD	Y. YOSHIOKA '93-06-16	III III	6251